


WELL LOCATION

County Greene Township Miami
Owner/Builder Arnovitz Enterprises
Address of Well Location 131 Dayton Yellow Springs
City Xenia Zip Code +4 45385
Permit No. 788769 Section/Lot No. _____

Location of Well in State Plane coordinates, if available:
N X 39° 47' 54" . 1" +/- 21' ft. or m
S Y 083° 55' 23" . 2" +/- 21' ft. or m
Elevation of Well 991' +/- 21" ft. or m
Datum Plain: NAD27 NAD83 Elevation Source BPS
Source of Coordinates: GPS Survey Other _____

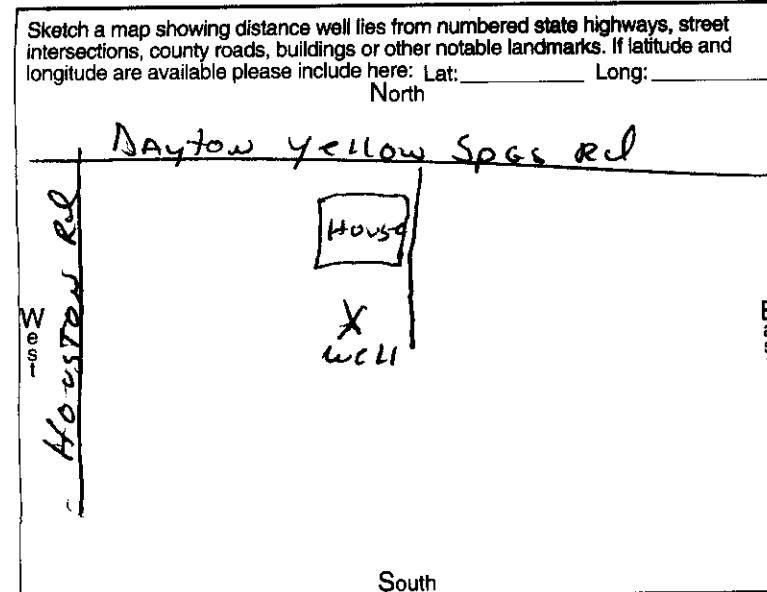

WELL TEST*
Pre-Pumping Static Level 11 ft. Date 1-27-10
Measured from: Top of Casing Ground Level Other _____
 Air Bailing Pumping* Other _____
Test Rate 6 gpm Duration of Test 2 hrs.
Feet of Drawdown 30 ft. Sustainable Yield 6 gpm
*(Attach a copy of the pumping test record, per section 1521.05, ORC)
Is Copy Attached? Yes No Flowing Well? Yes No
Quality Clear

PUMP/PITLESS
Type of pump _____ Capacity _____ gpm
Pump set at 65 ft. Pitless Type _____
Pump installed by _____

I hereby certify the information given is accurate and correct to the best of my knowledge.
Drilling Firm Hamilton & Sons
Address 9449 Milton Carlisle Rd.
City, State, Zip New Carlisle, OH 45344
Signed Shirley Hamilton Date 1-27-10
ODH Registration Number DD32

DRILLING DETAILS

Rotary Cable Augered Driven Other _____
BOREHOLE/CASING (measured from ground surface)
1) Borehole Diameter 7 7/8 inches Depth 46 ft.
Casing Diameter 5 in. Length 46 ft. Thickness .265 in.
2) Borehole Diameter 4 7/8 inches Depth 36 ft.
Casing Diameter _____ in. Length _____ ft. Thickness _____ in.
Casing Height Above Ground 1 ft.
Type 1 Steel 1 Galv. 1 PVC 1 _____
2 Steel 2 Galv. 2 _____ 2 Other _____
Joints 1 Threaded 1 Welded 1 Solvent 1 _____
2 Threaded 2 Welded 2 _____ 2 Other _____

SCREEN
Diameter _____ Slot Size _____ Screen Length _____ ft.
Type _____ Material _____
Set Between _____ ft. and _____ ft.

GRAVEL PACK (Filter Pack)
Material/Size _____ Volume/Weight Used _____
Method of Installation _____
Depth: Placed FROM _____ ft. TO _____ ft.

GROUT
Material Bentonite Volume/Weight Used 65 gals.
Method of Installation Tremie pipe
Depth: Placed FROM 46 ft. TO 0 ft.

DRILLING LOG*

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED.
Show color, texture, hardness, and formation: sandstone, shale, limestone, gravel, clay, sand, etc.

	From	To
<u>Clay</u>	<u>0</u>	<u>4</u>
<u>Clay & Gravel</u>	<u>4</u>	<u>44</u>
<u>Limestone</u>	<u>44</u>	<u>70</u>
<u>Shale</u>	<u>70</u>	<u>82</u>

water @ 68'

*(If more space is needed to complete drilling log, use next consecutively numbered form.)
Date of Well Completion 1-27-10 Total Depth of Well 82 ft.